

7.25" 6/7 4.6

PHYSICAL SPECIFICATIONS


MOTOR SIZE (OD)	7.25
BIT TO BEND (IN)	59.3
MAX WOB (LBS)	100,000
MAX PULL (LBS)	325,000
TRANSMISSION	TITANIUM FLEX

PERFORMANCE SPECIFICATIONS

MAX DIFF (PSI)	1,144
MAX TORQUE (FT-LBS)	19,547
STALL DIFF (PSI)	1,708
STALL TORQUE (FT-LBS)	29,326
MAX REC. HP	390
SPEED (RPG)	0.150
TORQUE SLOPE (FT-LBS/PSI)	17.17
FLOW RANGE (GPM)	400-800



TAG
DRILLING MOTOR CO.

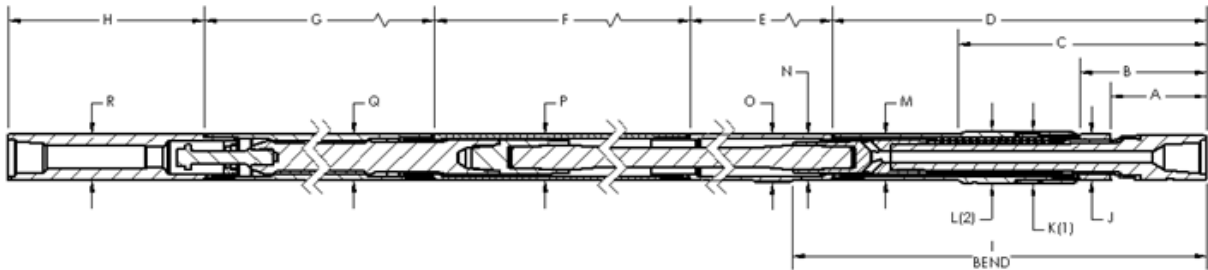

OUTER FISHING DIMENSIONS (FIXED)

A	B	C	D	E	F	G	H	I	J	K*	L*	M	N	O	P	Q	R
12.15	16.80	32.40	51.78	20.50	89.38	300.00	22.38	59.38	7.05	8.00	8.00	7.25	7.25	7.50	7.25	7.25	7.25

K* - If Running True Slick OD = 7.25"

L* If Running Stab Sleeve = Stab OD

