

7.25" 7/8 8.5

PHYSICAL SPECIFICATIONS


MOTOR SIZE (OD)	7.25
BIT TO BEND (IN)	59.3
MAX WOB (LBS)	100,000
MAX PULL (LBS)	325,000
TRANSMISSION	TITANIUM FLEX

PERFORMANCE SPECIFICATIONS

MAX DIFF (PSI)	2,130
MAX TORQUE (FT-LBS)	20,790
STALL DIFF (PSI)	3,190
STALL TORQUE (FT-LBS)	31,180
MAX REC. HP	681
SPEED (RPG)	0.260
TORQUE SLOPE (FT-LBS/PSI)	9.783
FLOW RANGE (GPM)	400-750



TAG
DRILLING MOTOR CO.

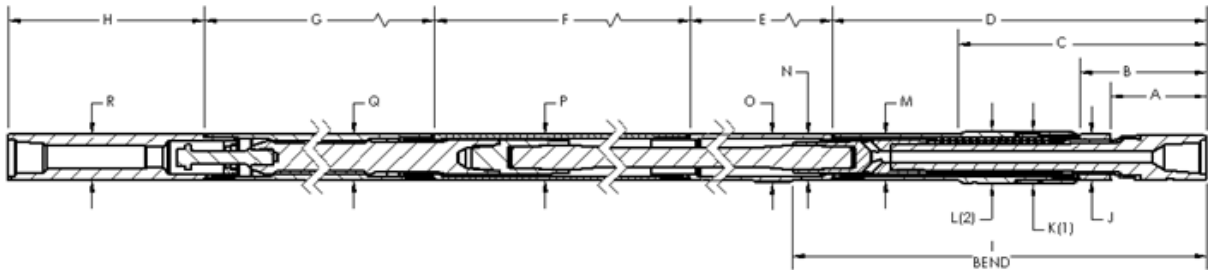

OUTER FISHING DIMENSIONS (FIXED)

A	B	C	D	E	F	G	H	I	J	K*	L*	M	N	O	P	Q	R
12.15	16.80	32.40	51.78	20.50	89.38	300.00	22.38	59.38	7.05	8.00	8.00	7.25	7.25	7.50	7.25	7.25	7.25

K* - If Running True Slick OD = 7.25"

L* If Running Stab Sleeve = Stab OD

