

6.5" 7/8 6.4

MOTOR SPECIFICATIONS


MOTOR OD (IN)	6.50
BIT TO BEND (IN)	49.63
MAX WOB (LBS)	70,000
MAX PULL (LBS)	380,000
TRANSMISSION	TITANIUM FLEX

PERFORMANCE SPECIFICATIONS

MAX DIFF (psi)	1,600
MAX TORQUE (ft-lb)	14,880
STALL DIFF (psi)	2,400
STALL TORQUE (ft-lb)	22,320
MAX REC. HP	411
SPEED (rpg)	0.288
TORQUE SLOPE (ft-lb/psi)	9.30
FLOW RANGE (gpm)	300-600



TAG
DRILLING MOTOR CO.

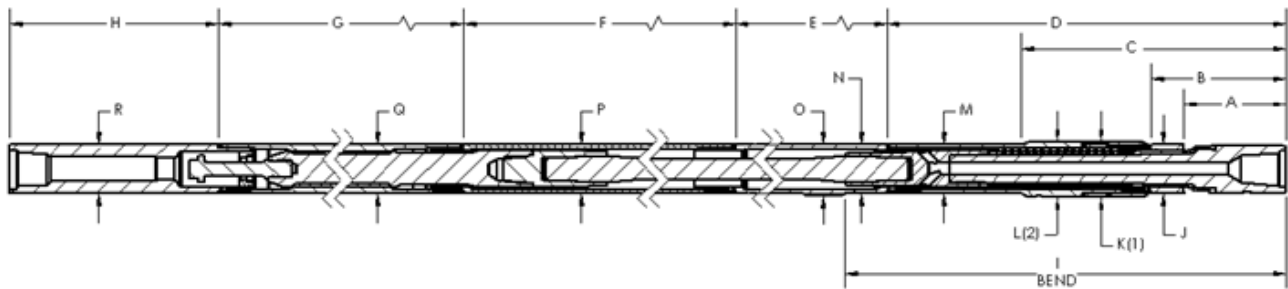

OUTER FISHING DIMENSIONS (FIXED)

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
10.88	15.88	33.9	47.88	20.0	68.38	245.2	22.38	49.63	6.55	6.50	6.50	6.50	6.50	6.75	6.50	6.50	6.50

